



- Hose** : MARINE FUEL HOSE, type FUHA115__
- Application** : Hoses are to be used for transportation of fuel, e.g. from tank to engine fuel filter, or as ventilation line on yachts and small craft
- Features** : Suitable for the following fluids:
- Diesel fuel (B7, max. 7% biodiesel)
 - Petrol fuel (E15, max. 15% ethanol)
- Small bending radius
- Lining** : Fuel and oil resistant, black, nitrile rubber (NBR).
- Reinforcement** : Polyester (PET) spiral with polyamide (PA) barrier.
- Cover** : Heat, weather, ozone, oil and abrasion resistant, black, Chemivic™ (Buna-N-Vinyl) synthetic rubber.
- Temperature** : Suitable for use in the range - 29 to + 82° Celsius (- 20 to + 180° Fahrenheit)
- Relevant CE Standards** : ISO 7840 A1 - 2.5 min fire test
 - Permeation rate of 100 g/m² or less per 24 h with Test Liquid C as specified in ISO 1817:2011
- ISO 10088
- Other Standards** : SAE J 1527 USCG Type A Class 1-15 - 2.5 min fire test
 - Permeation rate of 15 g/m² or less per 24 h with CE-10 fuel (CE-10 fuel: 90 % ASTM Fuel C and 10 % ASTM D 4806-6A Ethanol by volume)
- Meets EPA requirements for low permeation class A1-15 marine fuel lines.
- Classification** : Non
- Certification** : IMCI (RCD)

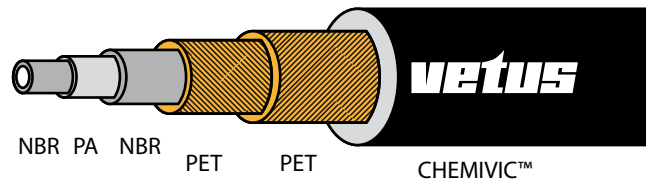

| Code | I.D. | | O.D | | Min. Burst Pressure | | Bending Radius | | Weight | |
|-----------|------|------|------|------|---------------------|-----|----------------|-------|--------|--------|
| | mm | inch | mm | inch | bar | psi | mm | inch | kg/m | lbs/ft |
| FUHA11506 | 6.35 | 1/4 | 15.9 | .627 | 17.2 | 250 | 13 | 1/2 | 0.22 | 0.15 |
| FUHA11508 | 7.94 | 5/16 | 16.7 | .658 | 17.2 | 250 | 22 | 7/8 | 0.24 | 0.16 |
| FUHA11510 | 9.53 | 3/8 | 18.4 | .725 | 17.2 | 250 | 22 | 7/8 | 0.30 | 0.20 |
| FUHA11513 | 12.7 | 1/2 | 22.6 | .89 | 12.1 | 175 | 35 | 1 3/8 | 0.38 | 0.26 |

Identification:

| |
|--|
|  |
| <p>Black ribbon with white text over full length of hose 0.3 meter Mark, Hose type and dimension repeated every 0.3 meter</p> |